

SMVector Drive

Flexible, simple, economical



SMVector
NOW AVAILABLE WITH
WASHDOWN ENCLOSURE AND
MULTIPLE COMMUNICATION
OPTIONS!



SMV NEMA 4X (IP65)



SMV NEMA 1 (IP31)

Lenze
AC Tech

SMVector | Simple vector control

Simplicity

By making Lenze-ACTech products easy to install, program and commission, we can provide the ideal motor control solution for both OEM designers and electrical systems engineers. An innovative removable EPM chip feature allows instant programming of multiple drives before or after installation, and a simple intuitive front panel display also facilitates easy in-situ operation.

Flexibility

The smv range of inverter drives offer fast dynamic torque response, sophisticated auto-tuning and impressive low speed operation from a compact, and simple to use package. The smv range is designed for motor applications where dynamic speed and torque control are required, ideal for conveyors, packaging lines and HVAC systems.

Performance

Initially available in the power range 0.25kW to 2.2kW for single-phase supplies and up to 7.5kW for 3 phase supplies, higher power variants up to 45kW will be available in the near future. Operating modes include standard and enhanced V/Hz (constant and variable) operation, vector speed control and vector torque control. Motor calibration is via an auto-tune function and a range of communication options are available including DeviceNet, RS-485 Modbus, LECOM, CANopen, Ethernet/IP and Profibus with further options introduced progressively.

Quality

A firm commitment to design quality and continuous development of our products ensures both high performance and reliability. Manufacturing facilities have recently been expanded with manufacturing systems and quality control procedures also upgraded to provide the highest possible quality product is delivered to customers worldwide.

Technical Support

With hundreds of experienced engineers on hand to help customers at all levels to solve problems and find the best solutions for their applications. End users can also be assured that Lenze-ACTech is always there throughout the lifecycle of its products. Technical information, literature and guides are also available from a multi-language website or the worldwide network of Lenze-ACTech branches and certified distributors.



SMVector | Features and Benefits:

The SMVector continues our price leadership tradition in the highly competitive AC drive market. Its performance and flexibility make it an attractive solution for a broad range of applications including:

- Food processing machinery
- Packaging machinery
- Material handling/conveying systems
- HVAC systems

The SMVector makes good its promise of price leadership in delivering unparalleled performance and simplicity. The SMVector is the right choice when you need it all – performance, power, packaging and intuitive programming.



SMV NEMA 4X (IP65)

SMV NEMA 1 (IP31)

Superior Performance

- Modes of Operation:
 - V/Hz (Constant and Variable)
 - Enhanced V/Hz (Constant and Variable)
 - Vector Speed Control
 - Vector Torque Control
- Dynamic Torque Response
- Sophisticated Auto-tuning (Motor Calibration)
- Impressive Low Speed Operation

Flexible Power Ranges

- International Voltages:
 - 120/240V, 1Ø (up to 1 Hp)
 - 200/240V, 1/3Ø (up to 3 Hp)
 - 200/240V, 3Ø (up to 20 Hp)
 - 400/480V, 3Ø (up to 25 Hp)
 - 480/600V, 3Ø (up to 25 Hp)

Industrial Grade Packaging

- NEMA Type 1 (IP31) Enclosure
- NEMA 4X (IP65)
- NEMA 12 (IP54)

Simplicity

- Intuitive User Interface
- Electronic Memory Module (EPM)

Electronic Programming Module (EPM)

Program the SMVector quickly and easily using the electronic programming module (EPM). The EPM stores the drive's parameter configuration and simplifies initial setup:

Three ways to program the EPM


- Use the intuitive SMVector integrated keypad
- Program in a Microsoft Windows™ environment with Techlink
- Or with the lightweight portable EPM programmer. The crystal clear 16-character LCD display makes programming multiple drives a snap.

- The EPM saves time and money. It's as easy as 1, 2, 3...
 1. Create your parameter profile and archive to the EPM programmer, a master EPM or your PC.
 2. Insert the EPM into the programmer and copy parameters in a matter of seconds!
 3. Plug the EPM into the drive and it is fully programmed and ready to go.

Imagine programming 20 drives in less than one minute.

- Improve efficiency. Program the drive anytime and anywhere it makes sense during your manufacturing or commissioning process. You can even plug in a fully programmed EPM before connecting the drive to power. Now the drive is ready and waiting for power to be connected.
- Safeguard your configuration. When you program the EPM your parameter settings are automatically archived. This truly unique feature allows the SMVector to be reset to factory default settings or to customer settings.


The EPM. Another example of the innovative thinking that separates Lenze-AC Tech from its competition.

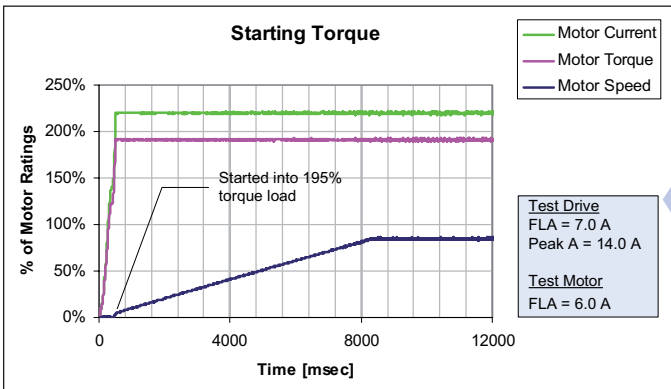

Exceptional Starting Torque

Overpower demanding applications


The SMVector is peerless in controlling the motor's ability to convert current into torque. In this example, the SMVector is started into a stiff 195% torque load. Not only does the motor start the load, but it also delivers a full 195% torque while accelerating to 50 Hz in 8 seconds.

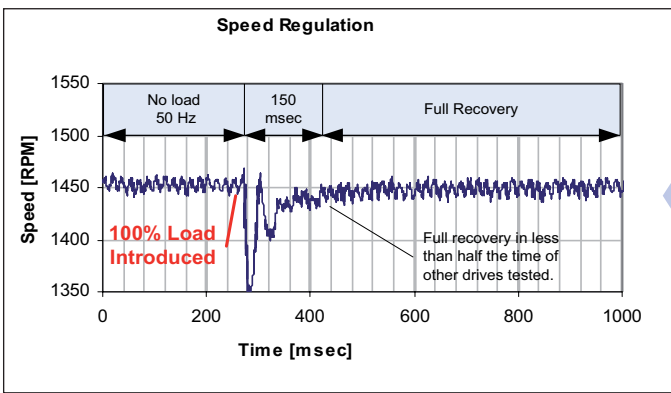

Dynamic Speed Regulation

Recovery from 100% shock load in 0.15 seconds

Shock loads are no match for the SMVector. Here an instantaneous 100% load is dealt with in a mere 0.15 seconds. Remarkably, this level of speed regulation is achieved open loop without the benefit of a feedback device.

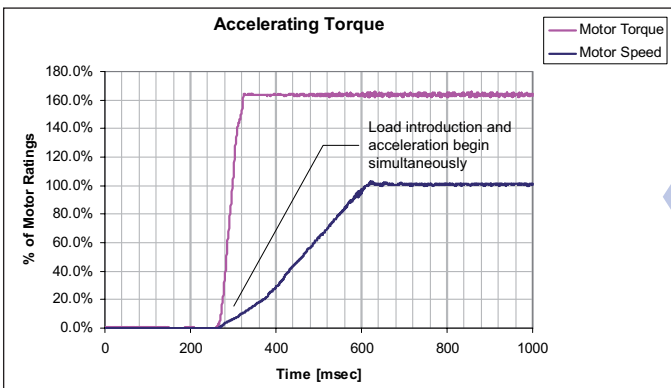

Quick Acceleration

0 to 100 in 0.33 seconds!

Motors controlled by the SMVector benefit from a sophisticated motor control algorithm that drives motor performance to maximum levels. In this application the the motor is able to drive a 165% torque load while accelerating from 0 to 100% speed in an impressive 0.33 seconds.

The SMV Thrives in Harsh Environments

Plastic Housing/Black Anodized Heatsink
Light weight and corrosion resistant

Totally Enclosed Non-Ventilating Housing

Compact Enclosures
Optimizes precious panel space



SMV NEMA 4X (IP65)

High Pressure Washdown Version
Can be ordered without keypad and display.

Optional Integrated EMC Filters
Meets CE regulations

No Cooling Fans on NEMA 4X (IP65) Models
Gives greater reliability in wet environments

SMVector | Specifications

World Class Control

Modes of Operation

- Open Loop Flux Vector Speed or Torque Control
- V/Hz (Constant or Variable)
- Enhanced V/Hz with Auto-tuning

Acceleration/Deceleration Profiles

- Two Independent Accel Ramps
- Two Independent Decel Ramps
- Linear
- S-Type
- Auxiliary Ramp-to-Stop

Output Frequency

- 500 Hz Standard
- 1,000 Hz Optional

Switching Frequency

- 4, 6, 8, 10, 12 or 16 kHz

Universal Logic Assertion (Selectable)

- Positive Logic Input
- Negative Logic Input

Braking Functions

- DC Injection Braking
- Optional Regenerative Braking

Speed Commands

- Keypad
- Jog
- Floating Point Control
- Voltage: Scalable 0 – 10 VDC
- Current: Scalable 4 – 20 mA
- Potentiometer
- 8 Preset Speeds

Process Control

- PID Modes: Direct and Reverse Acting
- PID Sleep Mode

Vigilant System Protection

Voltage Monitoring

- Low DC Bus V Protection
- High DC Bus V Protection
- Low Line V Compensation

Current Monitoring

- Motor Overload Protection
- Current Limiting Safeguard
- Phase Loss Protection
- Ground Fault
- Short Circuit Protection

Loss of Follower Management

- Protective Fault
- Go to Preset Speed or Preset Setpoint
- Initiate System Notification

Over Temperature Protection

Comprehensive Diagnostic Tools

Real Time Monitoring

- 8 Register Fault History
- Software Version
- Drive Network ID
- DC Bus Voltage (V)
- Motor Voltage (V)
- Output Current (%)
- Motor Current (A)
- Motor Torque (%)
- Power (kW)
- Energy Consumption (kWh)
- Heatsink Temperature (°C)
- 0 – 10 VDC Input (User Defined)
- 4 – 20 mA Input (User Defined)
- PID Feedback (User Defined)
- Analog Output (Speed, Load, Torque, kW)
- Network Speed (Baud Rate)
- Terminal Status
- Keypad Status
- Elapsed Run Time (Hours)
- Elapsed Power on Time (Hours)

Rugged Environmental Capabilities

NEMA Type 1 (IP31)

NEMA Type 4X (IP65)

NEMA Type 12 (IP54)

Ambient Temperature

- -10 to 55°C @ 6 kHz
- Derate 2.5% per °C Above 40°C

International Voltages

- +10/-15% Tolerance
- 120/240V, 1Ø
- 200/240V, 1 or 3Ø
- 200/240V, 3Ø
- 400/480V, 3Ø
- 480/600V, 3Ø

Global Standards

UL (North America)

cUL (Canada)

CE Low Voltage Directive (EN61800-5-1) (Europe)

CE EMC Directive (EN61800-3) with Optional EMC filter

GOST (Russia/Ukraine)

C-Tick (Australia/New Zealand)

Simple Six Button Programming

- Start
- Stop
- Forward/Reverse
- Scroll Up
- Scroll Down
- Enter/Mode

Informative LED Display

Vivid Illumination


- Easily Read from a Distance

Five Status LEDs

- Run
- Automatic Speed mode
- Manual Speed Mode
- Forward Rotation
- Reverse Rotation

Status Display

- Motor Status
- Fault Management
- Operational Information

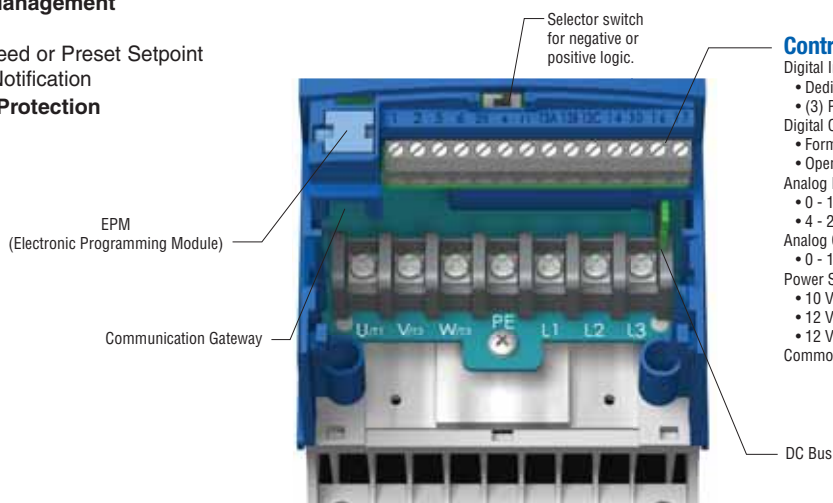

Control Terminals

- Digital Inputs
 - Dedicated Start/Stop
 - (3) Programmable
- Digital Outputs
 - Form "A" Relay
 - Open Collector
- Analog Inputs
 - 0 - 10 VDC
 - 4 - 20 mA
- Analog Outputs
 - 0 - 10 VDC
- Power Supplies
 - 10 VDC Potentiometer Ref
 - 12 VDC, 20 mA Digital Input Ref or OVDC Common
 - 12 VDC, 50 mA Supply Common


Lenze
AC Tech

ROHS
COMPLIANT

Removable terminal cover and steel conduit plate (not shown).
Easy access for control & power wiring.
An extra IP21 finger guard ships with every drive.

SMVector | Connectivity

With optional plug-in communication modules, the SMVector is easily integrated into any one of today's most commonly used industrial networks. Whether the application is to automate a single machine or an entire facility, the SMVector is fully equipped to make the process a snap.

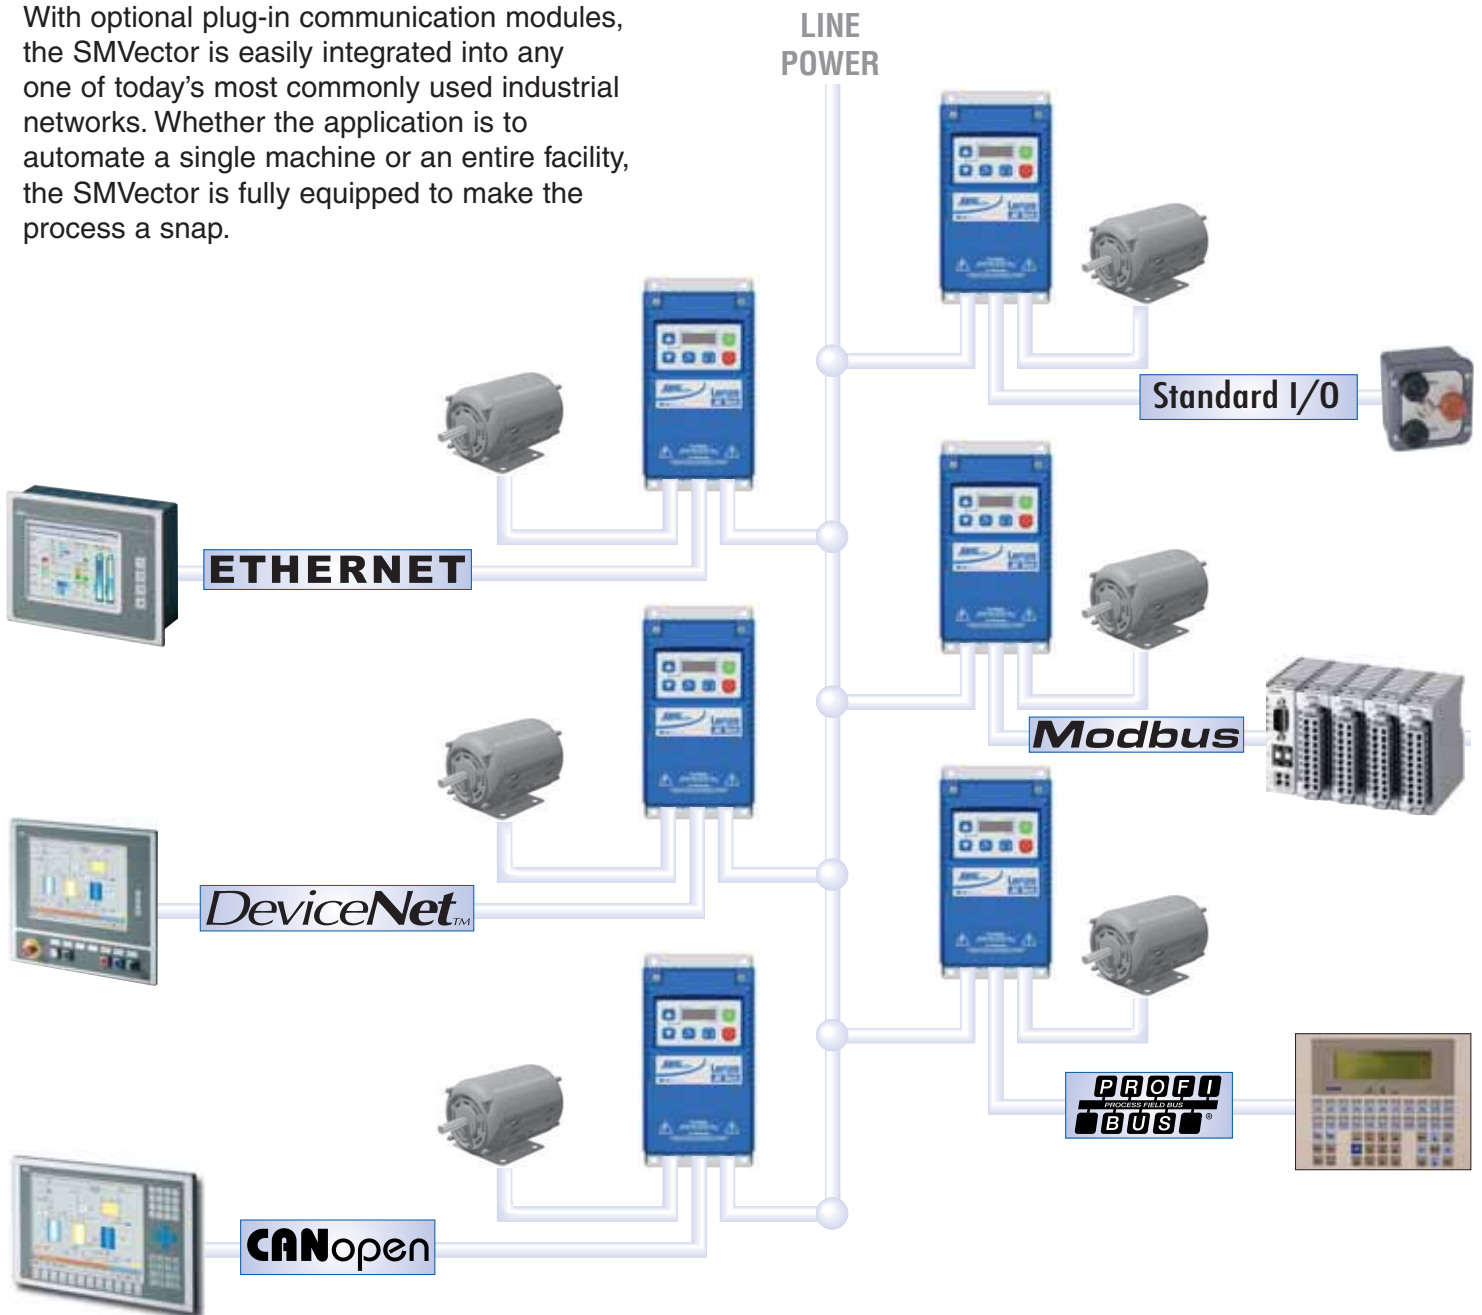

NOTE: Communication options are available in NEMA 1 (IP31), NEMA 4X (IP65) and NEMA 12 (IP54) models



Communication Module

Setting up a drive in a network has never been so simple. Order the SMVector factory direct with the communication module preinstalled. Or if the SMVector is already installed it can be easily upgraded in the field. Simply snap the communication module into the terminal cover and the drive is ready to connect to the network.

Lenze
AC Tech

120/240V - 1Ø Input (3Ø Output)

Model Number	Output Current I_n [A]	Power		Size		
		Hp	kW	NEMA 1 IP31	NEMA 4X IP65	NEMA 12 IP54
ESV251N01SX*	1.7	0.33	0.25	G1		
ESV371N01SX*	2.4	0.5	0.37	G1	R1	
ESV751N01SX*	4.2	1	0.75	G1	R1	

Notes: Output voltage will be twice line voltage when connected to a 120V source.
Output voltage will not exceed line voltage when connected to a 240V source.

200/240V - 1 or 3Ø Input (3Ø Output)

Model Number	Output Current I_n [A]	Power		Size		
		Hp	kW	NEMA 1 IP31	NEMA 4X IP65	NEMA 12 IP54
ESV251N02SX* (1)	1.7	0.33	0.25	G1		
ESV371N02YX*	2.4	0.5	0.37	G1	R1	
ESV751N02YX*	4.2	1	0.75	G1	R1	
ESV112N02YX*	6.0	1.5	1.1	G2	R2	
ESV152N02YX*	7.0	2	1.5	G2	R2	
ESV222N02YX*	9.6	3	2.2	G2	R3	

(1) The model ESV251N02SXB is 1Ø input only. For 3Ø INPUT use the ESV371N02YXB

200/240V - 3Ø Input (3Ø Output)

Model Number	Output Current I_n [A]	Power		Size		
		Hp	kW	NEMA 1 IP31	NEMA 4X IP65	NEMA 12 IP54
ESV112N02TX*	6.0	1.5	1.1	G2	R2	
ESV152N02TX*	7.0	2	1.5	G2	R2	
ESV222N02TX*	9.6	3	2.2	G2	R3	
ESV402N02TX*	16.5	5	4.0	G3	S1	
ESV552N02TX*	23	7.5	5.5	H1		S2
ESV752N02TX*	29	10	7.5	H1		S2
ESV113N02TX*	42	15	11.0	J1		
ESV153N02TX*	54	20	15.0	J1		

400/480V - 3Ø Input (3Ø Output)

Model Number	Output Current I_n [A]	Power		Size		
		Hp	kW	NEMA 1 IP31	NEMA 4X IP65	NEMA 12 IP54
ESV371N04TX*	1.3/1.1	0.5	0.37	G1	R1	
ESV751N04TX*	2.4/2.1	1	0.75	G1	R1	
ESV112N04TX*	3.5/3.0	1.5	1.1	G2	R2	
ESV152N04TX*	4.0/3.5	2	1.5	G2	R2	
ESV222N04TX*	5.5/4.8	3	2.2	G2	R3	
ESV402N04TX*	9.4/8.2	5	4.0	G3	S1	
ESV552N04TX*	12.6/11	7.5	5.5	H1		S2
ESV752N04TX*	16.1/14	10	7.5	H1		S2
ESV113N04TX*	24/21	15	11.0	J1		
ESV153N04TX*	31/27	20	15.0	J1		
ESV183N04TX*	39/34	25	18.5	J1		

480/600V - 3Ø Input (3Ø Output)

Model Number	Output Current I_n [A]	Power		Size		
		Hp	kW	NEMA 1 IP31	NEMA 4X IP65	NEMA 12 IP54
ESV751N06TX*	1.7	1	0.75	G1	R1	
ESV152N06TX*	2.7	2	1.5	G2	R2	
ESV222N06TX*	3.9	3	2.2	G2	R3	
ESV402N06TX*	6.1	5	4.0	G3	S1	
ESV552N06TX*	9	7.5	5.5	H1		S2
ESV752N06TX*	11	10	7.5	H1		S2
ESV113N06TX*	17	15	11.0	J1		
ESV153N06TX*	22	20	15.0	J1		
ESV183N06TX*	27	25	18.5	J1		

Dimensions

	H		W		D	
	in.	mm	in.	mm	in.	mm
G1	7.50	191	3.90	99	4.35	110
G2	7.50	191	3.90	99	5.45	138
G3	7.50	191	3.90	99	5.80	147
H1	9.83	250	5.12	130	6.30	160
J1	12.33	313	6.88	175	8.08	205
R1	8.00	203	6.28	160	4.47	114
R2	8.00	203	6.28	160	6.27	159
R3	8.00	203	7.38	187	6.77	172
S1	10.00	254	8.96	228	7.97	202
S2	10.00	254	8.04	204	7.97	202

SMV NEMA 4X (IP65)



* NOTE: For complete part number, replace "*" with B, C, or D.

B = NEMA 1 (IP31)
C = NEMA 4X (IP65)
D = NEMA 12 (IP54)

SMV NEMA 1 (IP31)



Bottom Entry with NEMA 1 Steel Conduit Plate



Bottom Entry with IP31 Finger Guard



- Joint customer visits anywhere in the world
- Sales presentations
- Sales literature
- Product support
- Market information
- Product information
- Competitor information
- Prices



Customer support


- Ordering
- Shipping
- Delivery
- ISO9001/2000



Organisational support anywhere in the world:

- Sales conferences
- Sales visits
- Technical conferences
- Exhibitions
- Translations
- Technical writing
- Marketing material
- Any language

"Worldwide markets are both fast growing and technology hungry, providing a huge opportunity for sales growth and business partnership for Lenze organisation."



New test rig facilities:

- Simulate operating conditions anywhere in the world
- Guarantee repairs
- Ensure optimum system compatibility

Providing the answers to all your technical questions:

- Software support
- Hardware support
- Commissioning advice
- Application assistance
- Options list
- Repairs
- Fault finding



Promotional Support

Everything you need to take products to market and generate enquiries.

- Press releases
- Advertising
- Website support
- Enquiry services
- Emailers to customers
- Case studies
- Newsletters
- Catalogues
- Brochures
- Datasheets
- Manuals



www.Lenze-ACTech.eu

AC Technology International Ltd.

14 Henry Close, Battlefield Enterprise Park, Shrewsbury, SY1 3TJ, United Kingdom

Tele: +44 (0)8707 872772 Fax: +44 (0)1743 464329 sales@Lenze-ACTech.eu
www.Lenze-ACTech.eu